




# RUSH RIVER

steel & trim

RushRiverSteel.com  
507-248-3577



**BeckryTech** Highly Durable Polyester System by Beckers offers a 40-year limited warranty and are ideal for a variety of residential, agricultural, industrial, and commercial metal building applications

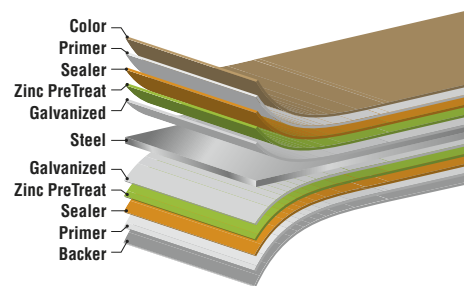

Standard Colors



Brilliant White\*



Alamo White\*



Light Stone\*



Ash Gray\*



Charcoal\*



Dark Green\*



Gallery Blue\*



Burnished Slate\*



Burgundy\*



Acrylic Bare\*



Taupe



Light Gray



Tan



Rustic Red



Bright Red



Hawaiian Blue



Brown



Hunter Green



Black



Copper Metallic

Textured Colors



BlackTex



BrownTex



BurgundyTex



RustTex



Quaker GrayTex



GreenTex



RedTex



Burnished SlateTex



Gallery BlueTex




Taupe Tex

Rush River Steel & Trim • 507.248.3577 • RushRiverSteel.com

Color selections are close representations but are limited by processing and viewing conditions. Actual metal samples are available by request. For all specific warranty, application, installation, and technical information regarding our products, please contact Rush River for more information.


\*Also available in 26 ga PBR panels

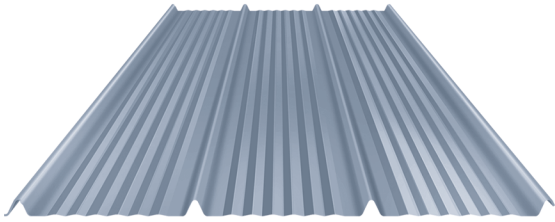

- 35" panel coverage
- 1" high rib
- Replicates Standing Seam Panel for half the price
- Exposed Fastener, Low Profile Fastener available
- Applies over open frame, but solid substrate recommended
- Minimum roof slope: 3:12
- 30 colors available
- Drip Stop felt available

## Testing & Approvals:


- UL790, Class A Fire Resistance
- UL2218 Class 4 Impact Resistance
- ASTM E 1646 Water Infiltration

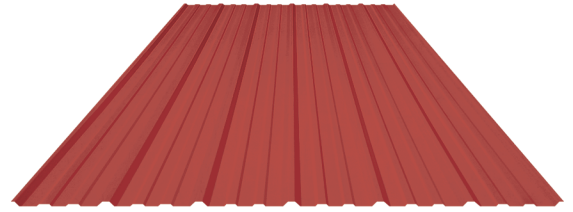

- 36" panel coverage
- 1/2" high rib
- Flat top rib on 6" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate
- Minimum roof slope: 3:12
- 30 colors available
- Drip Stop felt available

### Substrate Specifications:

- 29 ga. (.0150"), ASTM A653, Grade 80, minimum spangle, G60 zinc-coated (galvanized) structural steel
- G100 galvanized available for animal confinement buildings

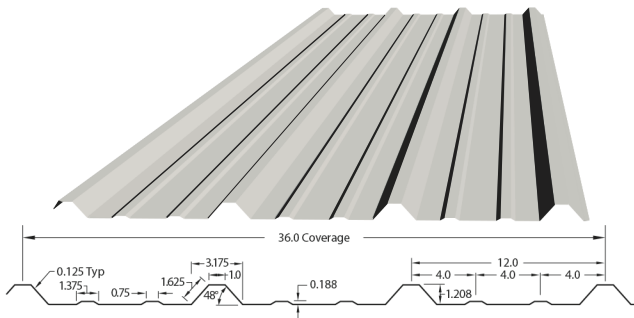

### PBR Panel Specifications:

- 36" panel coverage
- 1-1/4" high rib
- Trapezoidal rib on 12" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate
- Minimum roof slope: 1:12
- 10 colors available
- Drip Stop felt available

## Testing & Approvals:


- UL 790, Class A Fire Resistance
- UL 2218 Class 4 Impact Resistance



- BeckryTech Highly Durable Polyester Sytem by Becker Paints
- All colors Energy Star approved

### Substrate Specifications:

- 26 ga. (.0187), ASTM A653, Grade 80, minimum spangle, G60 zinc-coated (galvanized) structural steel
- G90 galvanized available for animal confinement buildings

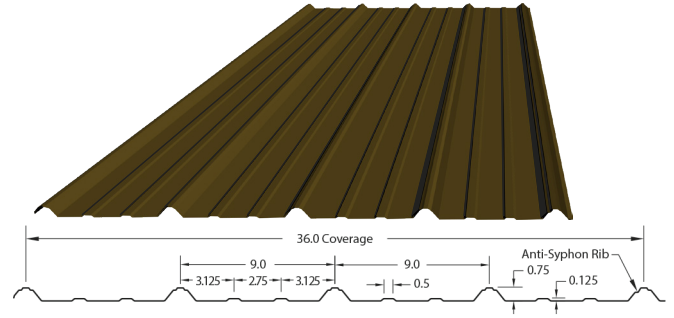

## Tuff-Rib Specifications

- 36" panel coverage
- 3/4" high rib
- Bell top trapezoidal rib on 9" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate
- Minimum roof slope: 3:12
- 28 colors available
- Drip Stop available

## Testing & Approvals:

- UL 790, Class A Fire Resistance
- UL 2218 Class 4 Impact Resistance
- ASTM E 1646 Water infiltration

### Paint Specifications:

- BeckryTech Highly Durable Polyester System by Becker Paints
- All colors Energy Star approved
- The new *Textured BeckryTech* finish now available in 8 leading colors

### Substrate Specifications:

- 29 ga. (.0150), ASTM A653, Grade 80, minimum spangle, G60 zinc-coated (galvanized) structural steel
- G100 galvanized available for animal confinement buildings